




VINEYARDS

ORCHARDS

GL4T/GL5T Deck Mower

A unique deck mower with two under-the-row mowing heads to cut grass between plants in the row of a vineyard/orchard. The reach of each cutting head can be individually adjusted according to your specific row width. Each cutting head has a fully-adjustable sensor rod to retract and cut around the base of the vine/tree. Heavy duty all steel design ensures many years of reliable service.

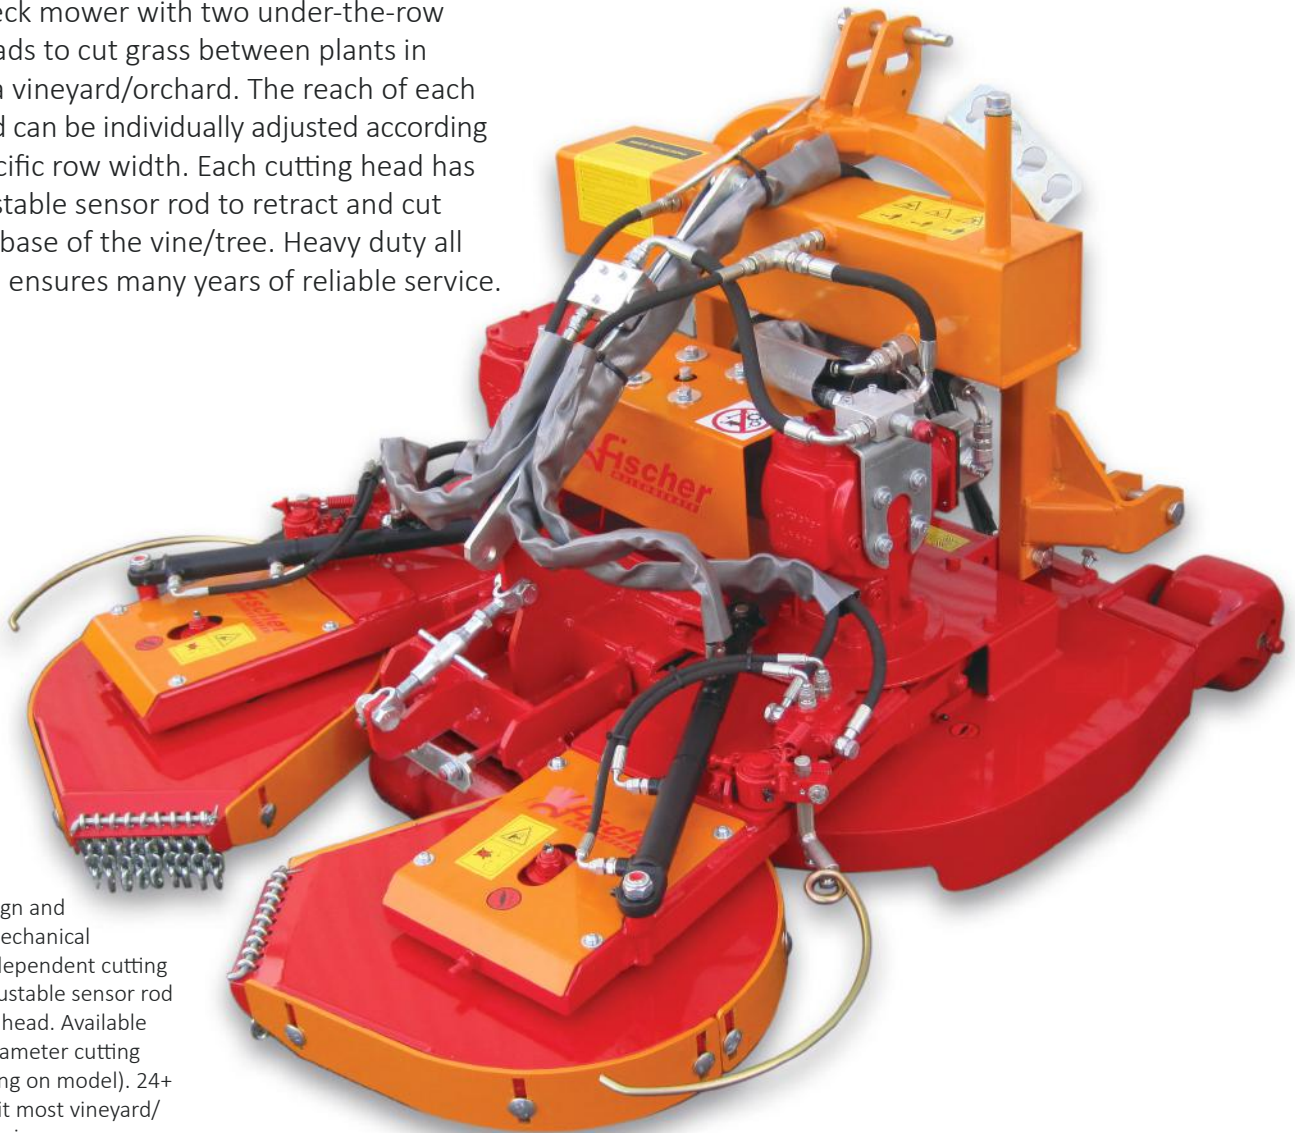

Heavy duty design and construction. Mechanical (belt-driven) independent cutting heads. Fully adjustable sensor rod on each cutting head. Available with 18"-35" diameter cutting heads (depending on model). 24+ model sizes to fit most vineyard/orchard row spacings.

STANDARD EQUIPMENT

- | Cat. 1 & 2 three-point hitch
- | Easy adjustable sensor rod
- | Adjustable metal wheels/roller for cutting height adjustment
- | 540 rpm PTO gearbox
- | Flow control on all hydraulic components
- | Cat. 5 heavy duty driveline with slip-clutch protection



707.996.2605 | MGEquipment@gmail.com | MGEweb.com
Fax 707.996.3405 | P.O. Box 655 | Vineburg, CA 95487



GL4T/GL5T IN-ROW DECK MOWER

MODEL	NR. BLADES	TRACTOR SIZE	WEIGHT	CUTTING DISKS	EXT. DIMENSIONS MIN (A)–MAX (B)	ROW SPACING
GL/4T-45—95-175 SP	8	30–80 Hp	946	18"	38–69"	4'
GL/4T-50—110-195	8	30–80 Hp	990	20"	45–77"	5'
GL/4T-50—120-205	8	30–80 Hp	1,100	20"	47–79"	
GL/4T-50—130-215	8	30–80 Hp	1,232	20"	51–84"	6'
GL/4T-50—140-225	8	30–80 Hp	1,320	20"	57–89"	
GL/4T-60—140-245	8	40–80 Hp	1,342	24"	57–96"	
GL/4T-60—160-260	8	40–80 Hp	1,386	24"	65–103"	7–8'
GL/4T-60—180-280	8	40–80 Hp	1,452	24"	70–109"	
GL/4T-60—200-300	8	50–80 Hp	1,540	24"	78–119"	8–9'
GL/4T-60—220-320	8	50–80 Hp	1,628	24"	85–126"	
GL/4T-70—160-280	8	50–80 Hp	1,428	28"	67–110"	
GL/4T-70—180-300	8	50–80 Hp	1,474	28"	71–119"	
GL/4T-70—200-320	8	50–80 Hp	1,562	28"	79–128"	8–10'
GL/4T-70—220-340	8	50–80 Hp	1,650	28"	85–133"	
GL/4T-80—180-320	8	50–80 Hp	1,496	31"	73–124"	
GL/4T-80—200-340	8	50–80 Hp	1,581	31"	78–132"	
GL/4T-80—220-360	8	50–80 Hp	1,672	31"	86–142"	9–11'
GL/4T-90—200-360	8	60–90 Hp	1,452	35"	80–102"	
GL/4T-90—220-380	8	60–90 Hp	1,540	35"	88–149"	
GL/4T-90—240-400	8	60–90 Hp	1,584	35"	95–157"	10–12'
GL/5T-90—290-450	10	70–120 Hp	1,870	35"	115–176"	
GL/5T-90—330-490	10	70–120 Hp	2,156	35"	128–190"	
GL/5T-90—360-520	10	70–120 Hp	2,420	35"	141–204"	
GL/5T-90—380-540	10	70–120 Hp	3,080	35"	148–211"	