


# GLM In-Row Deck Mower

A unique deck mower with two under-the-vine mowing heads to cut grass between plants in the row of a vineyard/orchard. An ideal series mower suited for smaller compact tractors from 18 Hp and super narrow vineyard row spacings.

Gas spring actuated cutting heads clean gently around the base of vines/trees. The overall reach of both cutting disks can be adjusted hydraulically from the tractor. Heavy duty all steel design ensures many years of reliable service.

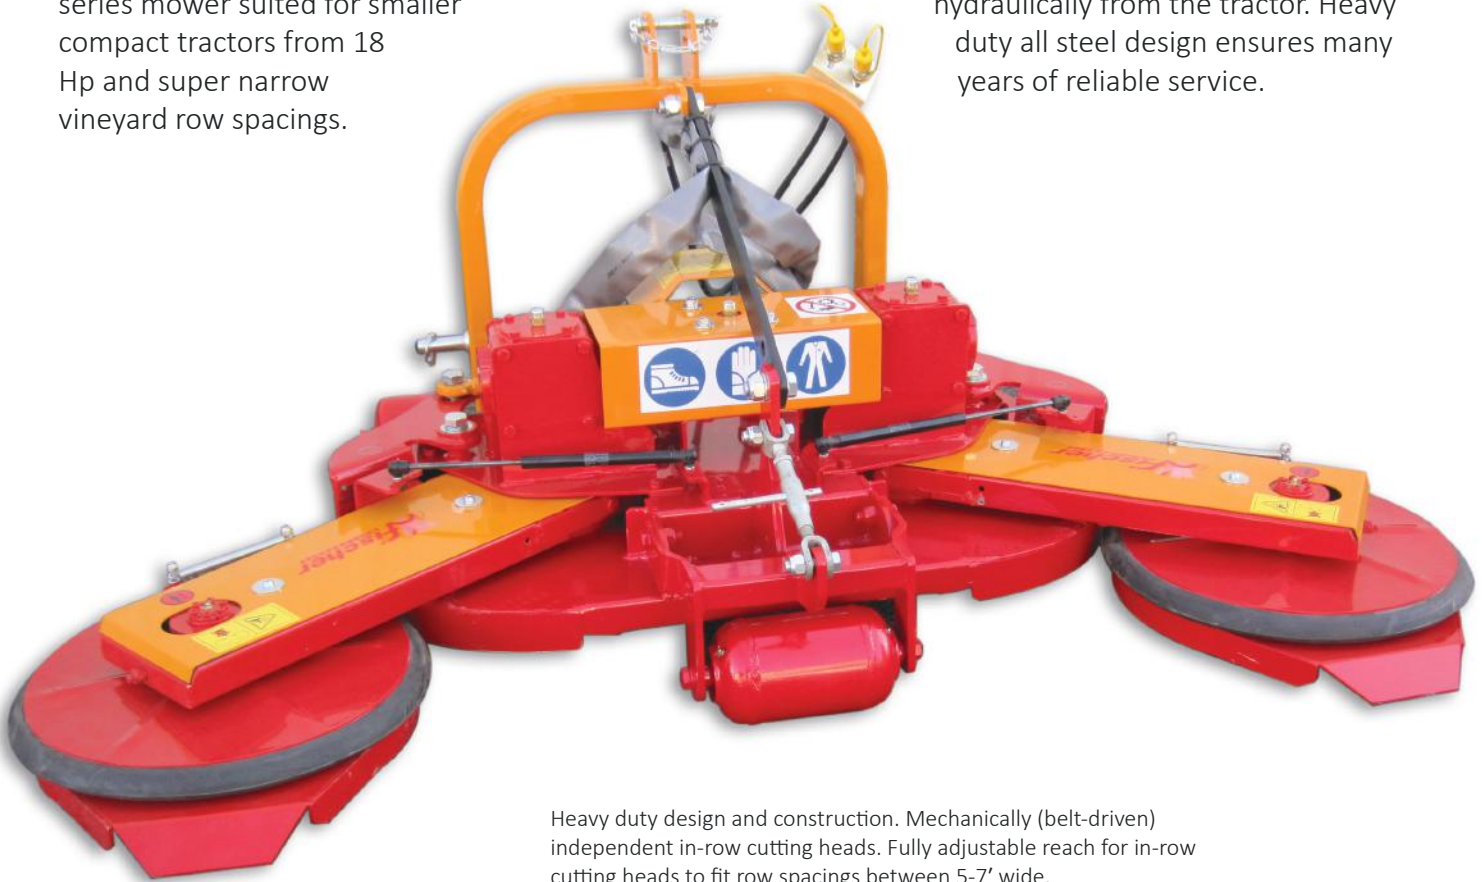

Heavy duty design and construction. Mechanically (belt-driven) independent in-row cutting heads. Fully adjustable reach for in-row cutting heads to fit row spacings between 5-7' wide.


## STANDARD EQUIPMENT

- | Cat. I three point linkage
- | 540 rpm PTO gearbox
- | Ideal model for compact tractors between 18-45 Hp
- | Synchronized reach adjustment on L/R cutting heads (using 1 tractor hydraulic remote valve)
- | Protective rubber bumper around oscillating cutting heads
- | Heavy duty gas-filled spring shocks
- | Adjustable metal wheels/roller for cutting height adjustment
- | Heavy duty design and construction
- | Furnished with Cat.4 PTO driveline

## GLM DUAL IN-ROW DECK MOWER

MODEL	TRACTOR SIZE	WEIGHT	CUTTING DISKS	EXT. DIMENSIONS MIN (A)–MAX (B)	ROW SPACING
GLM4/45—110-190	18–35 Hp	407	18"	47–75"	5.5–6'
GLM4/45—120-200	18–35 Hp	418	18"	49–78"	
GLM4/45—130-210	18–35 Hp	429	18"	50–83"	
GLM4/45—140-220	18–35 Hp	440	18"	54–86"	
GLM4/45—150-230	18–35 Hp	451	18"	59–91"	6–7'
GLM4/45—160-240	18–35 Hp	462	18"	63–95"	

## IMPLEMENT FEATURES

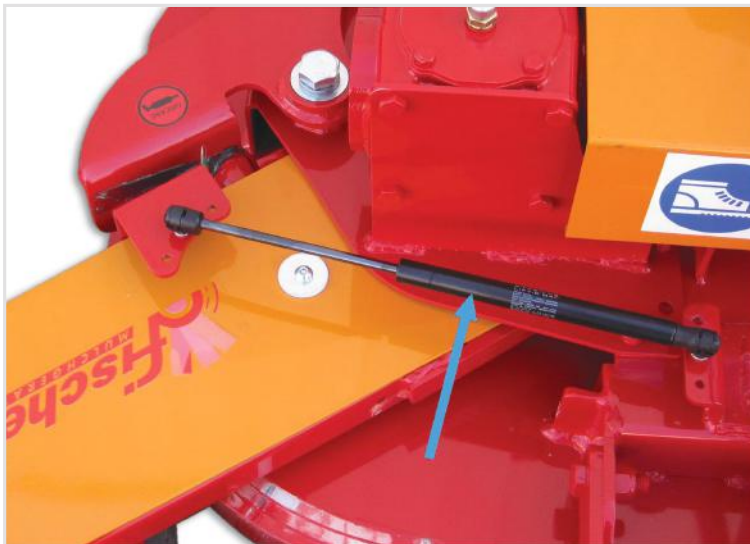

Heavy duty gas spring shocks on each swing arm



Oscillating cutting head with rubber bumper "rolls" around vines / stakes