


GL4W In-Row Deck Mower

A unique deck mower designed to cut grass in the row and between plants in a vineyard or orchard in a single pass. Mechanically (belt-driven) independent in-row cutting heads move in-and-out of rows using a load-sensitive spring mechanism. Spring actuated cutting heads without a sensor rod cut grass up to the trunk of a vine or tree. The minimum and maximum reach of in-row cutting heads is adjusted by hydraulic remote valves from tractor. Mower is available in 11 models sizes with 18" or 24" cutting heads. Metal and solid rubber wheels adjust mower cutting height. Heavy duty design and construction.

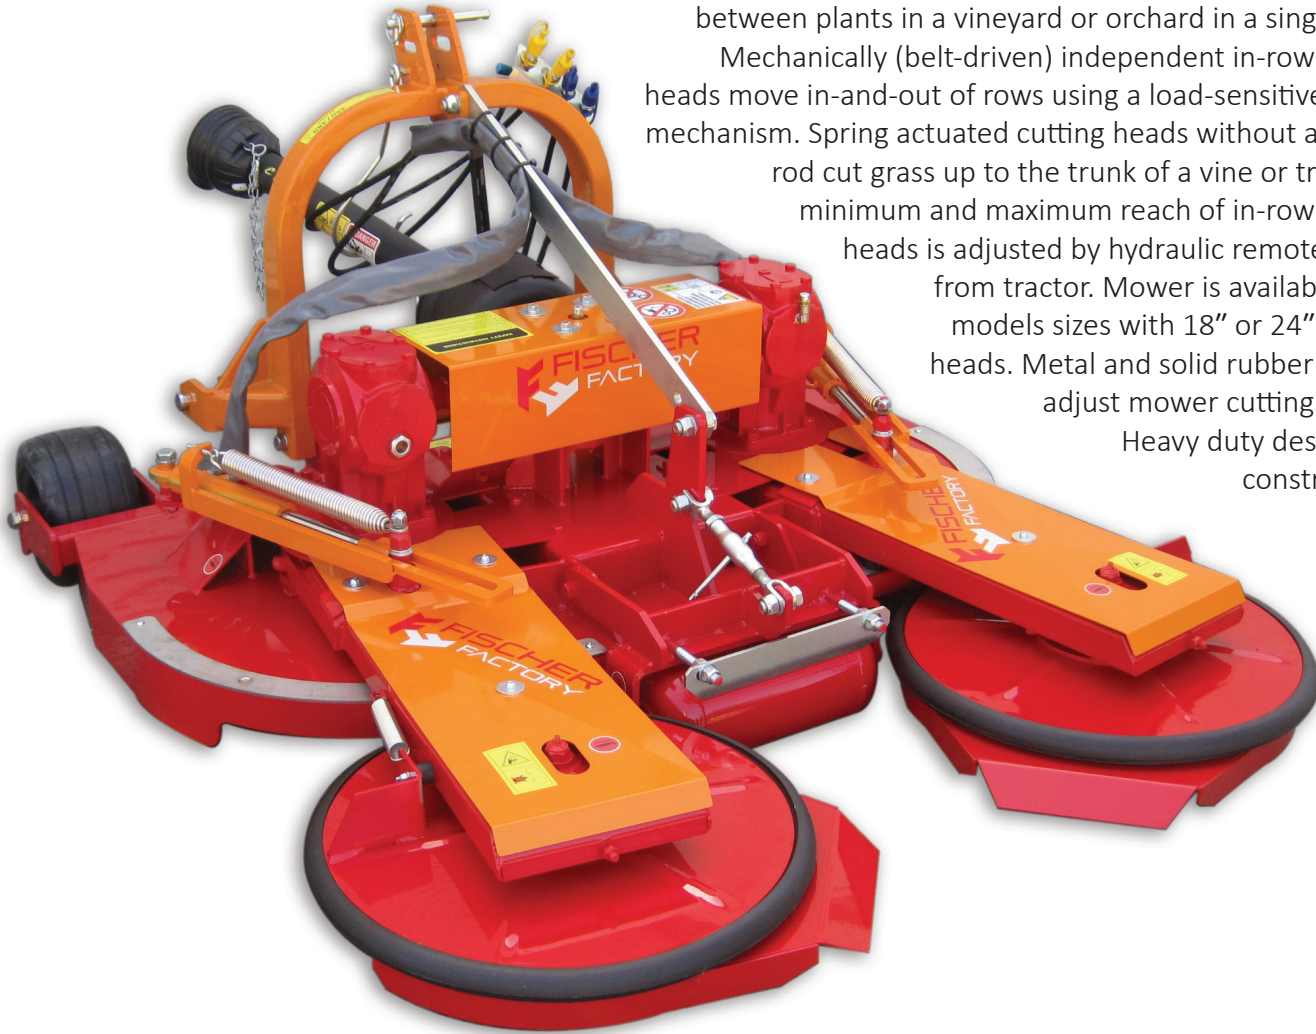

STANDARD EQUIPMENT

- | Cat. I/II three point linkage
- | 540 rpm PTO gearbox
- | Independent reach adjustment of L/R cutting heads (using 2 tractor hydraulic remote valves)
- | Spring actuated swing arms
- | Adjustable wheels and rear roller to regulate mowing height
- | Oscillating cutting heads with rubber protection ring
- | Heavy duty design and construction
- | Furnished with Cat. 4 PTO driveline
- | Simple mechanical design for reliable service and maintenance

GL4W DECK MOWER

MODEL	CUTTING DISKS	WEIGHT	EXT. DIMENSIONS MIN (A)–MAX (B)	TRACTOR SIZE	ROW SPACING
GL4W-45—110—190	18"	1,074	46–74"	30–80 Hp	
GL4W-45—120—200	18"	1,089	48–79"	30–80 Hp	6'
GL4W-45—130—210	18"	1,100	52–83"	30–80 Hp	
GL4W-45—140—220	18"	1,155	55–87"	30–80 Hp	6.5–7'
GL4W-60—140—245	24"	1,214	55–95"	30–80 Hp	
GL4W-60—150—255	24"	1,250	61–100"	40–80 Hp	
GL4W-60—160—265	24"	1,313	63–104"	40–80 Hp	7–8'
GL4W-60—180—285	24"	1,388	71–112"	40–80 Hp	8–9'
GL4W-60—200—305	24"	1,467	79–119"	50–80 Hp	
GL4W-60—220—325	24"	1,588	85–128"	50–80 Hp	9–10'
GL4W-60—240—345	24"	1,692	95–136"	60–90 Hp	10–11'



Oscillating cutting heads with rubber protection ring



Heavy duty spring-actuated swing arms